

## ZE LUMA SERIES

Constructed using an industrial grade aluminum extrusion built to withstand the test of time, the ZE is an ideal solution with a two-inch pitch light engine that provides general illumination and pathway lighting for applications that require a robust and reliable fixture.

Offered with either a standard or high output light engine configuration, the ZE delivers up to 740 lumens. Housed in a heavy duty extruded aluminum envelope and protected by a UV resistant polycarbonate lens, the ZE will perform in the most extreme weather conditions.


When combined with onboard 0 – 10 V<sub>DC</sub> dimming and the ability to be mounted in either an articulating or fixed position, the ZE becomes a reliable and versatile solution for architects, specifiers and lighting designers to use with confidence.

Available in twelve inch increments up to four feet in length and configurable in either series or parallel to a single driver, the ZE will meet the needs of many general illumination applications with demanding environmental needs.

### Features

- Made in America quality and craftsmanship
- UV stabilized polycarbonate lens
- Five standard CCTs plus options for colored customization
- Daisy chain configurable wiring to a single driver
- Thermal monitoring and current control combine to maintain light levels while guarding against overheating

### Mechanical Profile & Compliance

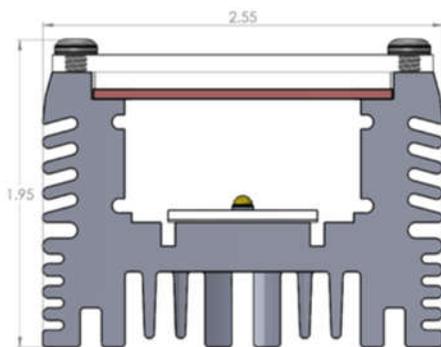

- All dimensions in INCHES



## LOW VOLTAGE LINEAR LUMINAIRE




Specifications					
CCT	2700K	3000K	3500K	4000K	5000K
LED Pitch	2"				
Lumen Output					
SO	379	429	437	445	530
HO	528	600	612	624	744
CRI	80+ & 90+				
Beam Angle	115°				
Lens	Clear				
Dimmable	Yes				
On Board Dimming	Yes				
Construction	Aluminum & Plastic				
Housing	Clear Anodized Aluminum				
Fixture Length <sub>Min</sub>	12"				
Fixture Length <sub>Max</sub>	48"				
Ordering Increments	12"				
Daisy-Chain Capable	Yes				
Power Consumption <sub>W/F</sub>	SO 7W   HO 10W				
Efficacy <sub>LM/W</sub>					
SO	54	61	62	64	76
HO	53	60	61	62	74
Power Supply	Class II				
Operating Voltage <sub>DC</sub>	24V				
Fixture Connectors	Outdoor PlugnGo				
Fixture Mounting	Low Profile Bracket, Extended Profile Bracket				
Environmental Rating	Wet				
Certifications	UL				
Warranty <sub>Limited</sub>	5 years				
Product	2.50 x 1.94 in				
Dimensions <sub>WxH</sub>					
Operating Temp Range	-20 to 120 °F				
Storage Temp Range	-40 to 160 °F				
Weight	3.2 lb / ft				

Specifications subject to change without prior notification

**Ordering Information**


Example: ZE-18H-835-115C-LE-ORX-LP

Product	Length <sup>1</sup>	Output	CRI	Color	Beam Angle	Lens	Ingress Cable Orientation	iPosition	Termination <sup>2</sup>	Egress Cable Orientation <sup>4</sup>	ePosition	Mount
ZE	##	<u>S</u> O <u>H</u> O	<u>8</u> 0+ <u>9</u> 0+	27 30 35 40 50 RED GRN BLU AMB	115	<u>C</u> lear	<u>L</u> eft <u>R</u> ight	<u>E</u> nd <u>B</u> ack <u>N</u> earside <u>F</u> arside	<u>O</u> PG	<u>R</u> ight <u>L</u> eft	<u>X</u> - None <u>E</u> nd <u>B</u> ack <u>N</u> earside <u>F</u> arside	LP - Low Profile EP - Extended Profile FC - Fixed Clip

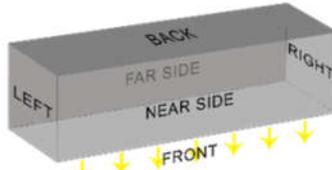


<sup>1</sup> Fixture length in inches, <sup>2</sup> CRI does not apply to Colors; leave blank <sup>3</sup> Outdoor PlugGo <sup>4</sup> Will always be the opposite letter of the Ingress Cable Orientation (R or L)

**Mounting Clips**

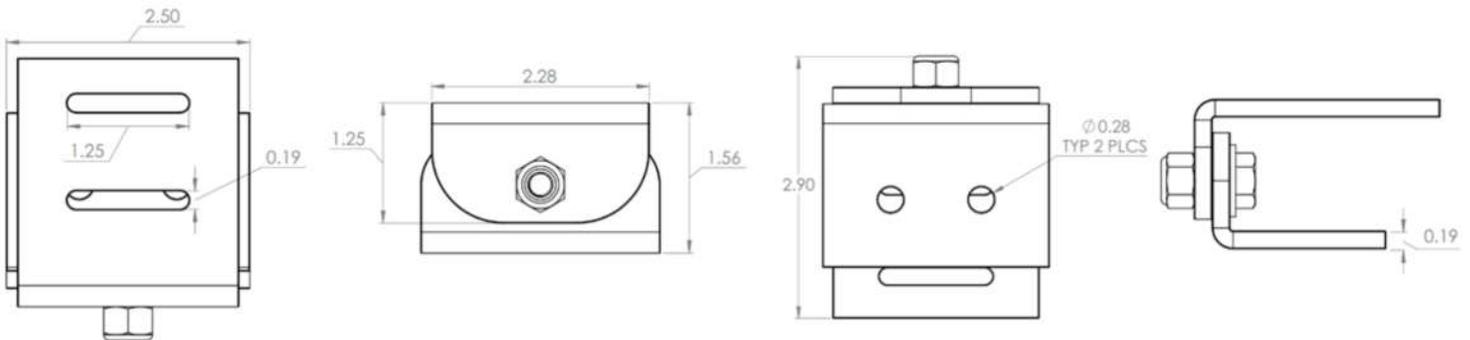

**Low Profile Bracket**

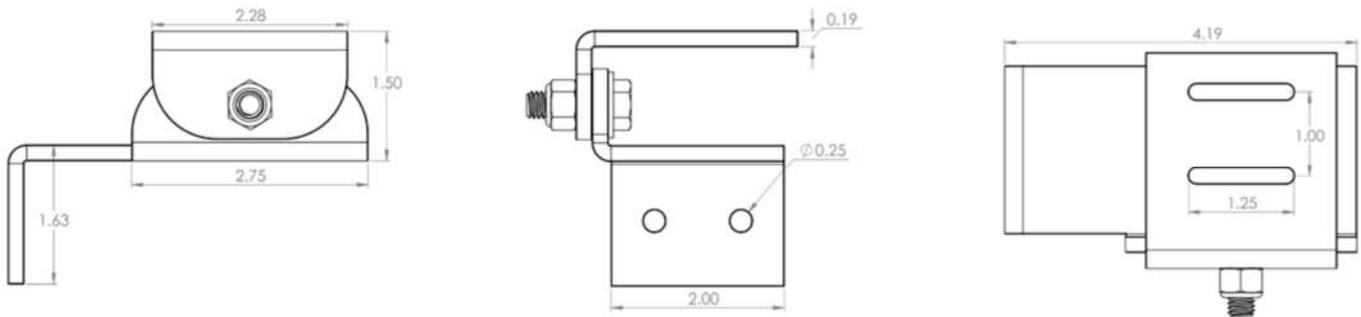

**Extended Profile Bracket**

- All dimensions in INCHES

**Dimming**

The Luma Series of products are designed with a built-in dimming circuit that requires a 0 - 10 V<sub>DC</sub> sinking dimming controller to properly function. Either a third party sinking dimmer controller can be used or one of two available options in the LEDynamics LVD Series of products.

